ACCU-TRAC

LP

LOW PROFILE
ATTACHMENT SYSTEMS
TYPICAL DETAILS

ROUTE & RETURN
# EXPOSED SEALANT SYSTEM

(ES SYSTEM)
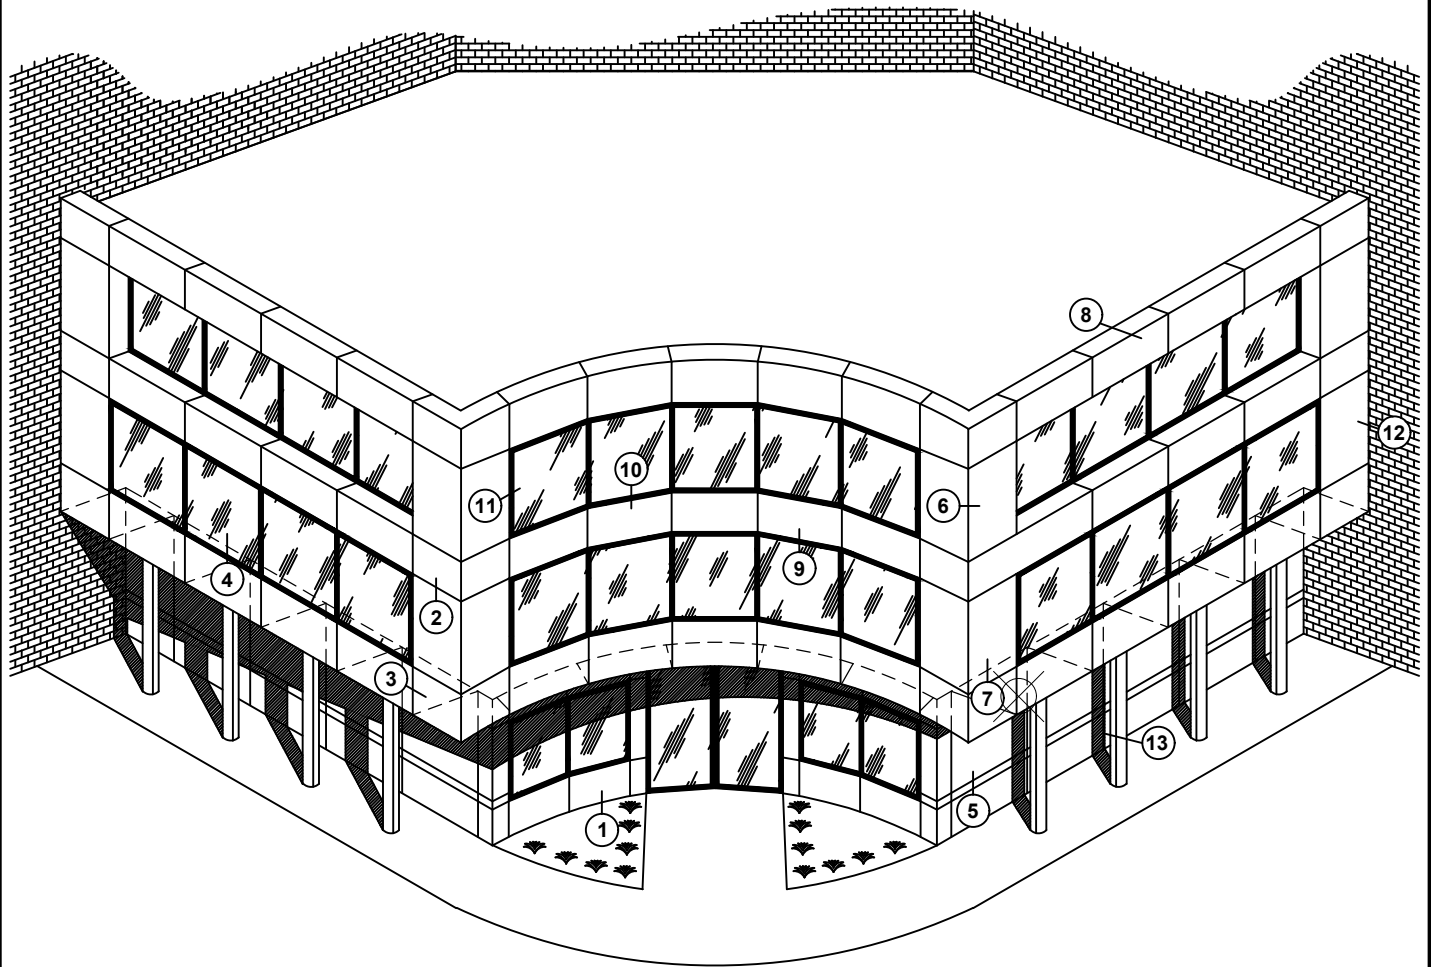
ALUMINUM
COMPOSITE
MATERIAL
(ACM) PANEL

#12-14 TEK FASTENER
(NO MORE THAN 16" O.C.)

$1\frac{9}{16}$"
TYP.
MIN.

SUPPORTING
FRAMING

"F-LP"
(SHOP ATTACHED
PERIMETER EXTRUSION)

$\frac{1}{2}$" TYP.

PLASTIC SHIM
(PER JOB REQUIREMENTS)

SEALANT AND
BACKER-ROD

"J-LP"
(CONTINUOUS STARTER
"J" EXTRUSION)
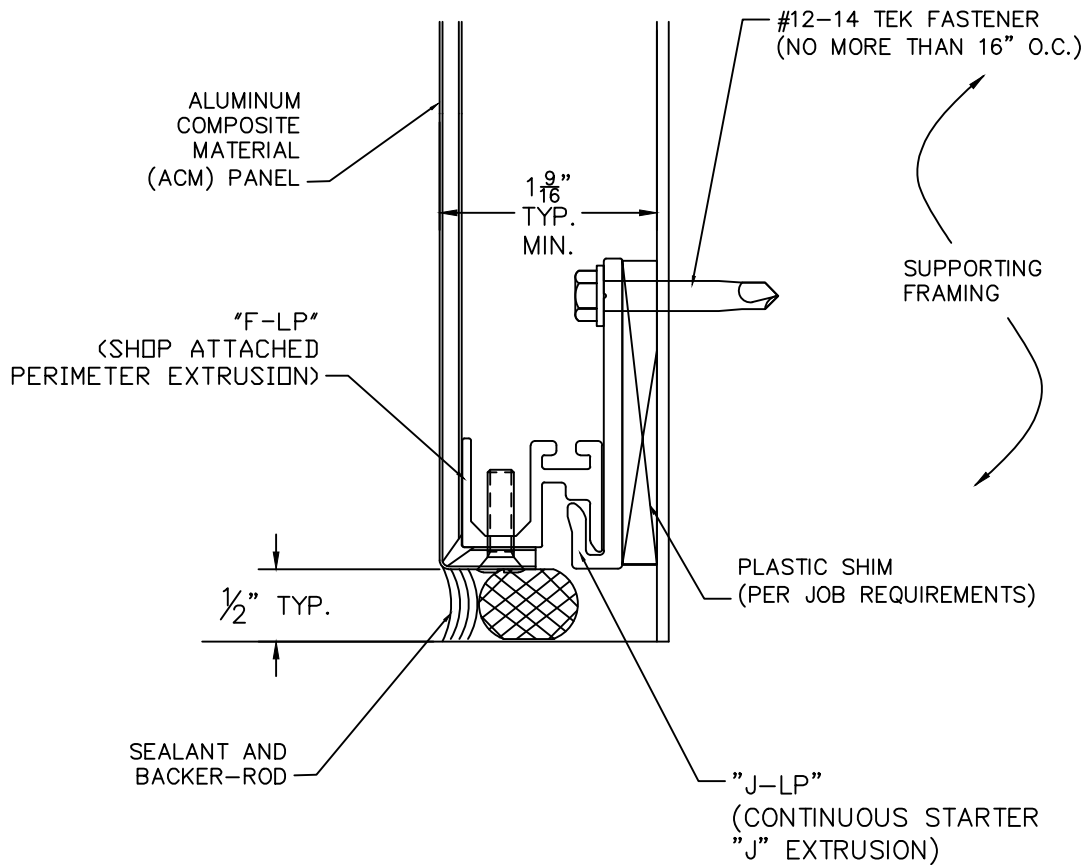
1 SILL TERMINATION

SCALE: NONE

ALUMINUM
COMPOSITE
MATERIAL
(ACM) PANEL

$1\frac{9}{16}$"
TYP.
MIN.

SUPPORTING
FRAMING

"F-LP"
(SHOP ATTACHED
PERIMETER EXTRUSION)

$\frac{1}{2}$" TYP.

#12-14 TEK FASTENER
(NO MORE THAN 16" O.C.)

SEALANT AND
BACKER-ROD

PLASTIC SHIM
(PER JOB REQUIREMENTS)

"F-LP"
(SHOP ATTACHED
PERIMETER EXTRUSION)

"M-LP"
(SLIDING ATTACHMENT CLIP)
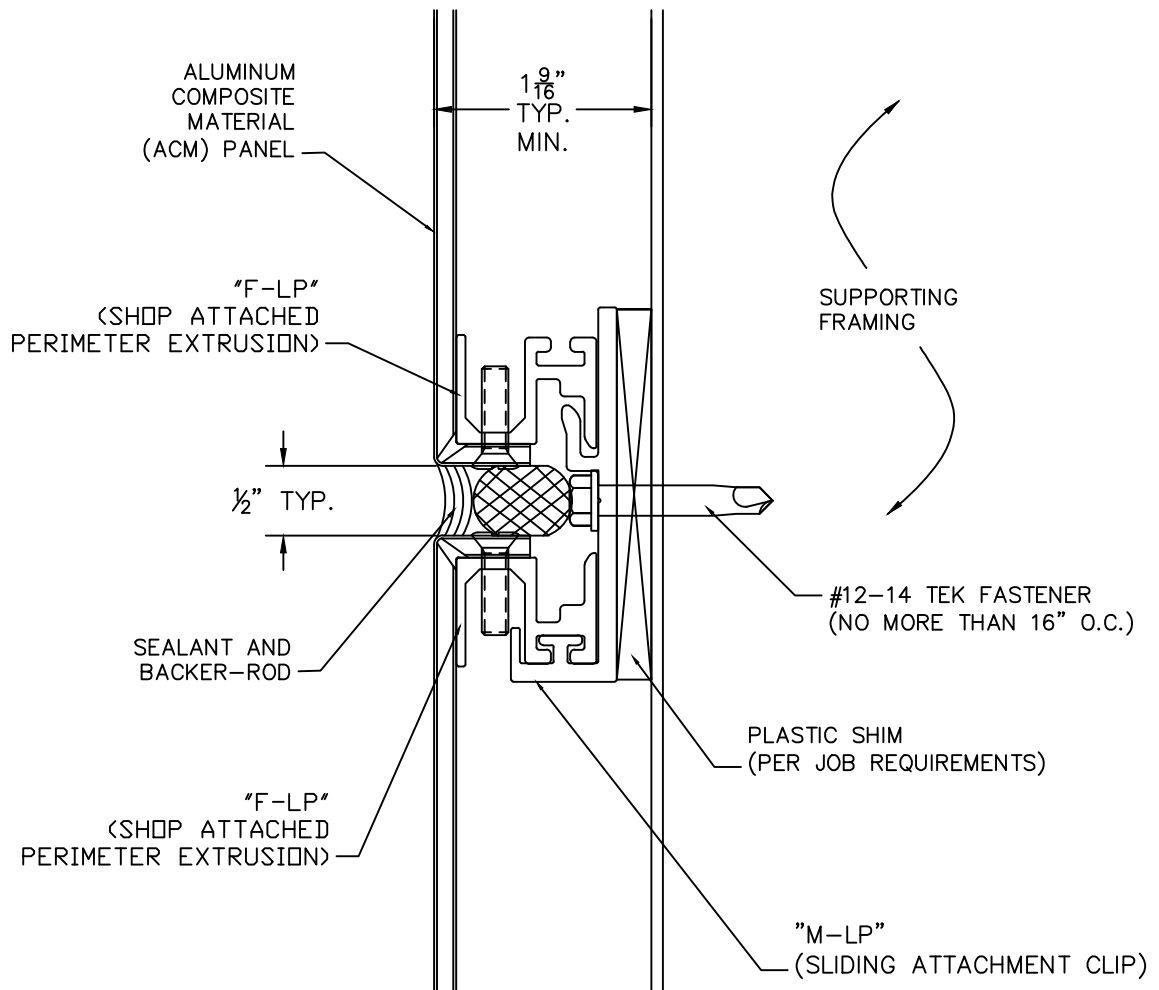
2 TYP. HORIZONTAL JT.

SCALE: NONE

SUPPORTING
FRAMING

#12-14 TEK FASTENER
(NO MORE THAN 16" O.C.)

PLASTIC SHIM
(PER JOB REQUIREMENTS)

"M-LP"
(SLIDING ATTACHMENT CLIP)

"F-LP"
(SHOP ATTACHED
PERIMETER EXTRUSION)

$1\frac{9}{16}$"
TYP.
MIN.

ALUMINUM
COMPOSITE
MATERIAL
(ACM) PANEL

"F-LP"
(SHOP ATTACHED
PERIMETER EXTRUSION)

$\frac{1}{2}$"
TYP.

SEALANT AND
BACKER-ROD
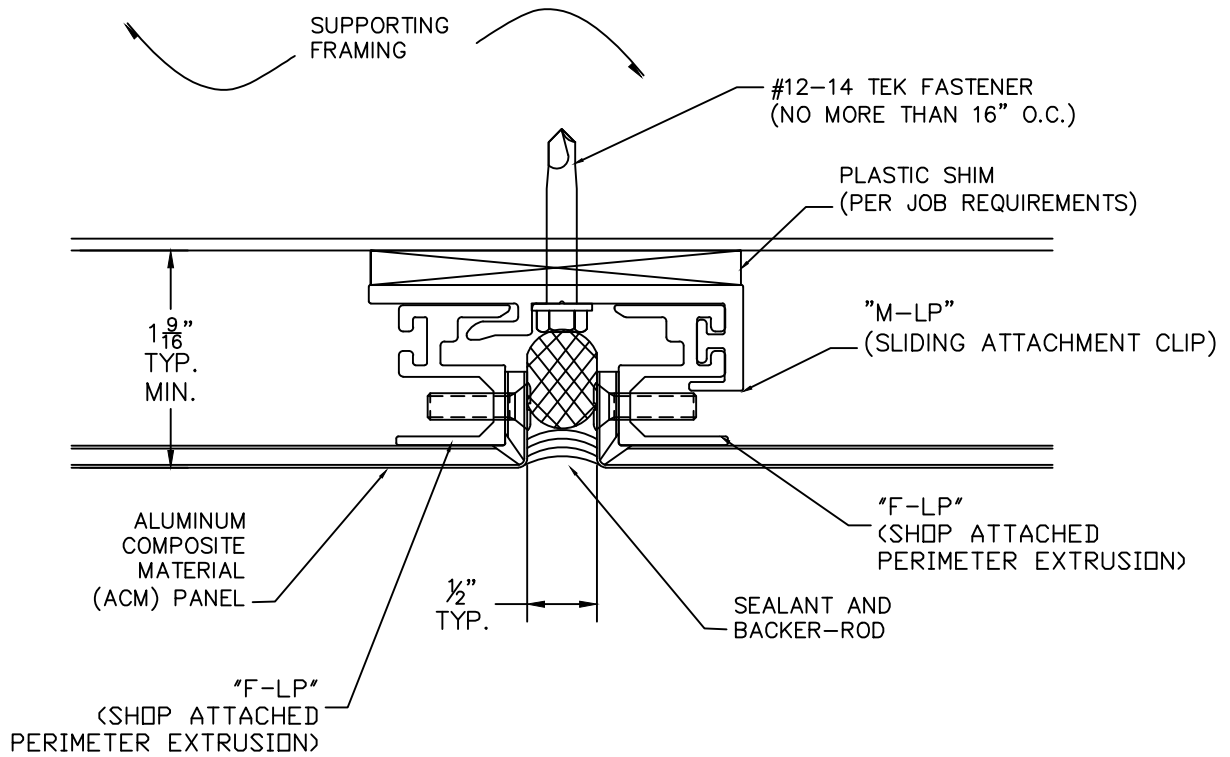
3 TYP. VERTICAL JT.
SCALE: NONE

"MM-LP"
(SLIDING TERMINATION
CLIP EXTRUSION)

½" TYP.

#12-14 TEK FASTENER
(NO MORE THAN 16" O.C.)

SEALANT AND
BACKER-ROD

PLASTIC SHIM
(PER JOB REQUIREMENTS)

"F-LP"
(SHOP ATTACHED
PERIMETER EXTRUSION)

$1\frac{9}{16}$"
TYP.
MIN.

ALUMINUM
COMPOSITE
MATERIAL
(ACM) PANEL

SUPPORTING
FRAMING

4   HEAD TERMINATION
SCALE: NONE

½" TYP.

SEALANT AND
BACKER-ROD

FIXING
ANGLE

ALUMINUM
COMPOSITE
MATERIAL
(ACM) PANEL

$1\frac{9}{16}$"
TYP.
MIN.

#12-14 TEK FASTENER
(NO MORE THAN 16" O.C.)

PLASTIC SHIM
(PER JOB REQUIREMENTS)

SUPPORTING
FRAMING

4A   ALT. HEAD TERMINATION
SCALE: NONE

"J-LP"
(CONTINUOUS
"J" EXTRUSION)

ALUMINUM
COMPOSITE
MATERIAL
(ACM) PANEL

#12-14 TEK FASTENER
(NO MORE THAN 16" O.C.)

$1\frac{9}{16}$"
TYP.
MIN.

WEEP HOLE BAFFEL

MOISTURE BARRIER

"F-LP"
(SHOP ATTACHED
PERIMETER EXTRUSION)

5/8" WATER
RESISTANT BOARD

THIS DIM.
CAN VARY

ACM REVEAL
STRIP

SUPPORTING
FRAMING

"F-LP"
(SHOP ATTACHED
PERIMETER EXTRUSION)

#12-14 TEK FASTENER
(NO MORE THAN 16" O.C.)

"MM-LP"
(SLIDING TERMINATION
CLIP EXTRUSION)

PLASTIC SHIM
(PER JOB REQUIREMENTS)
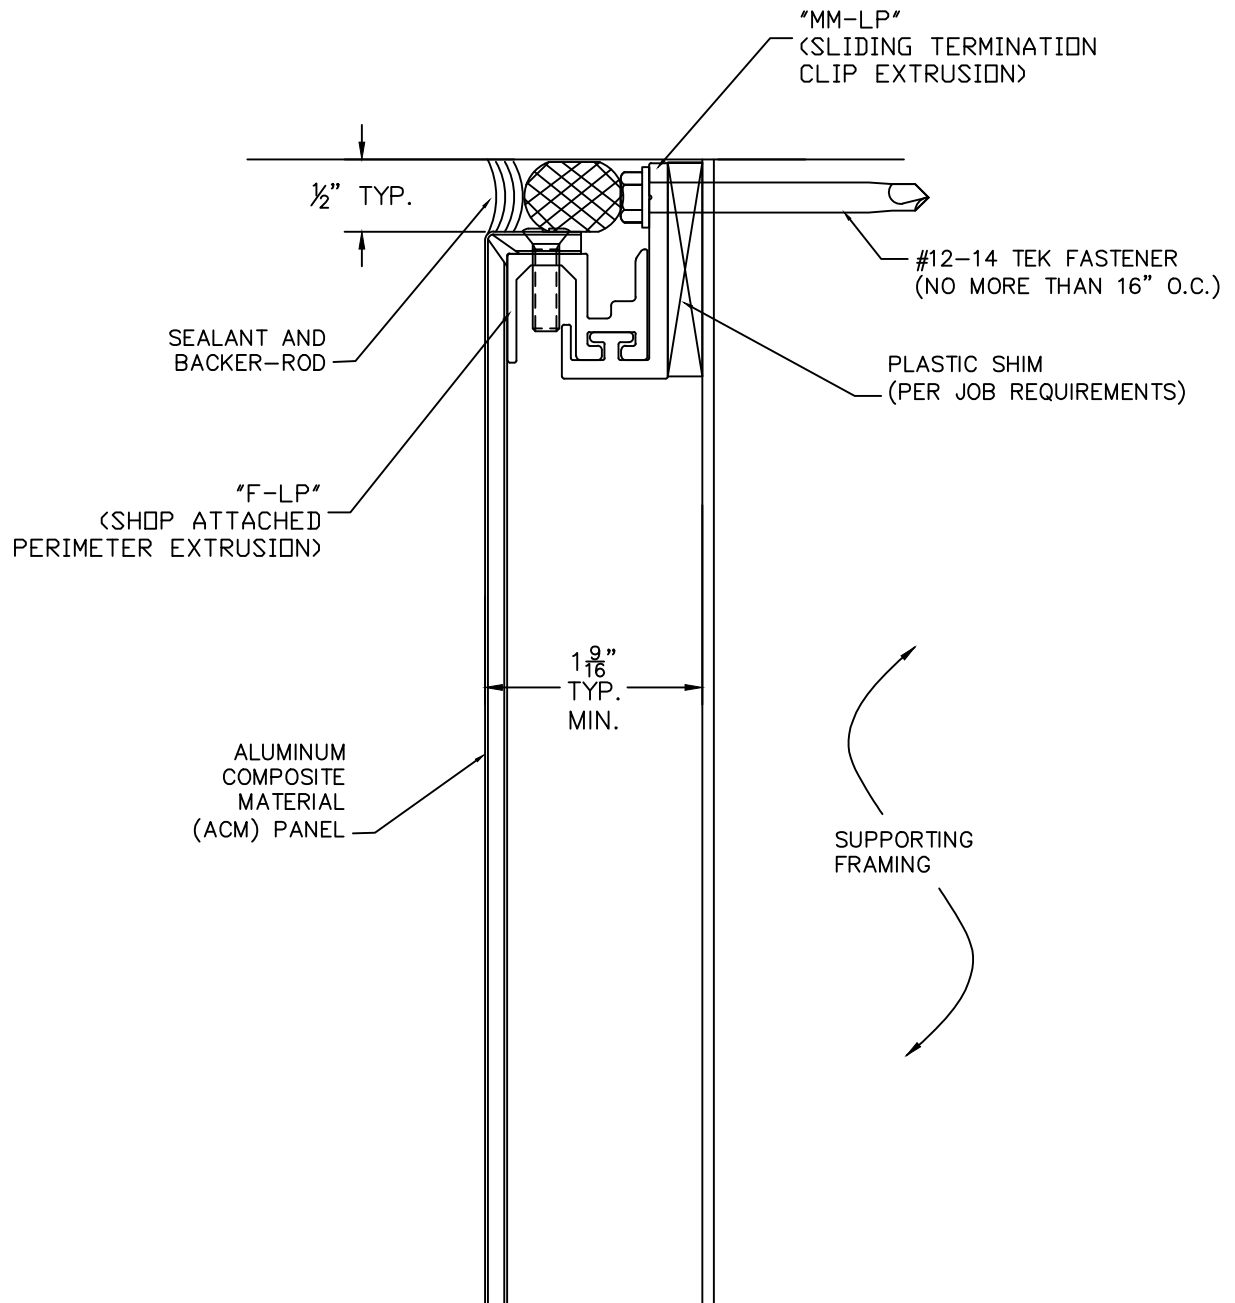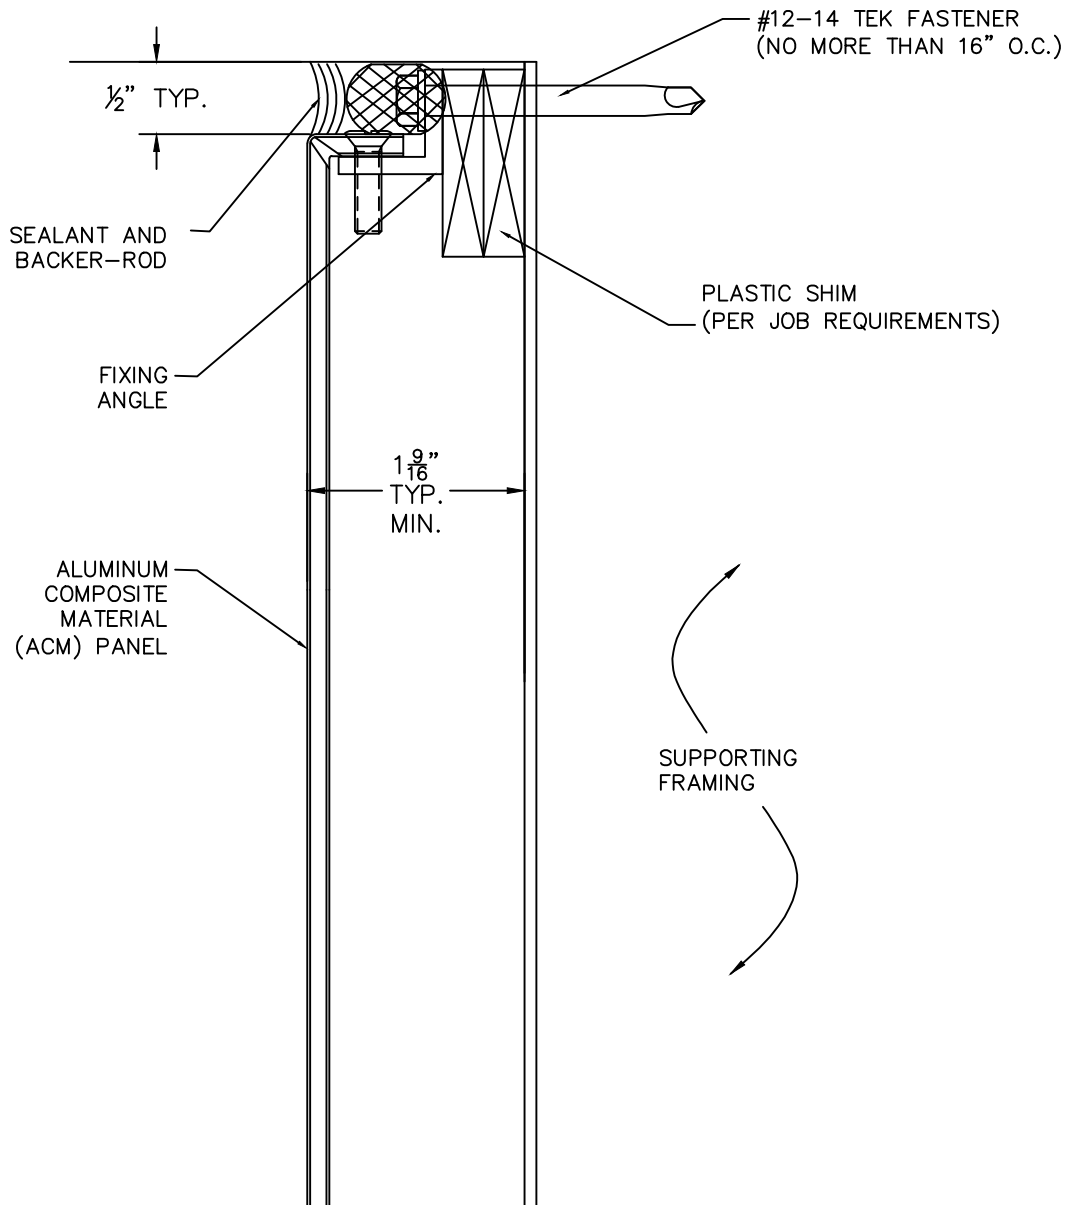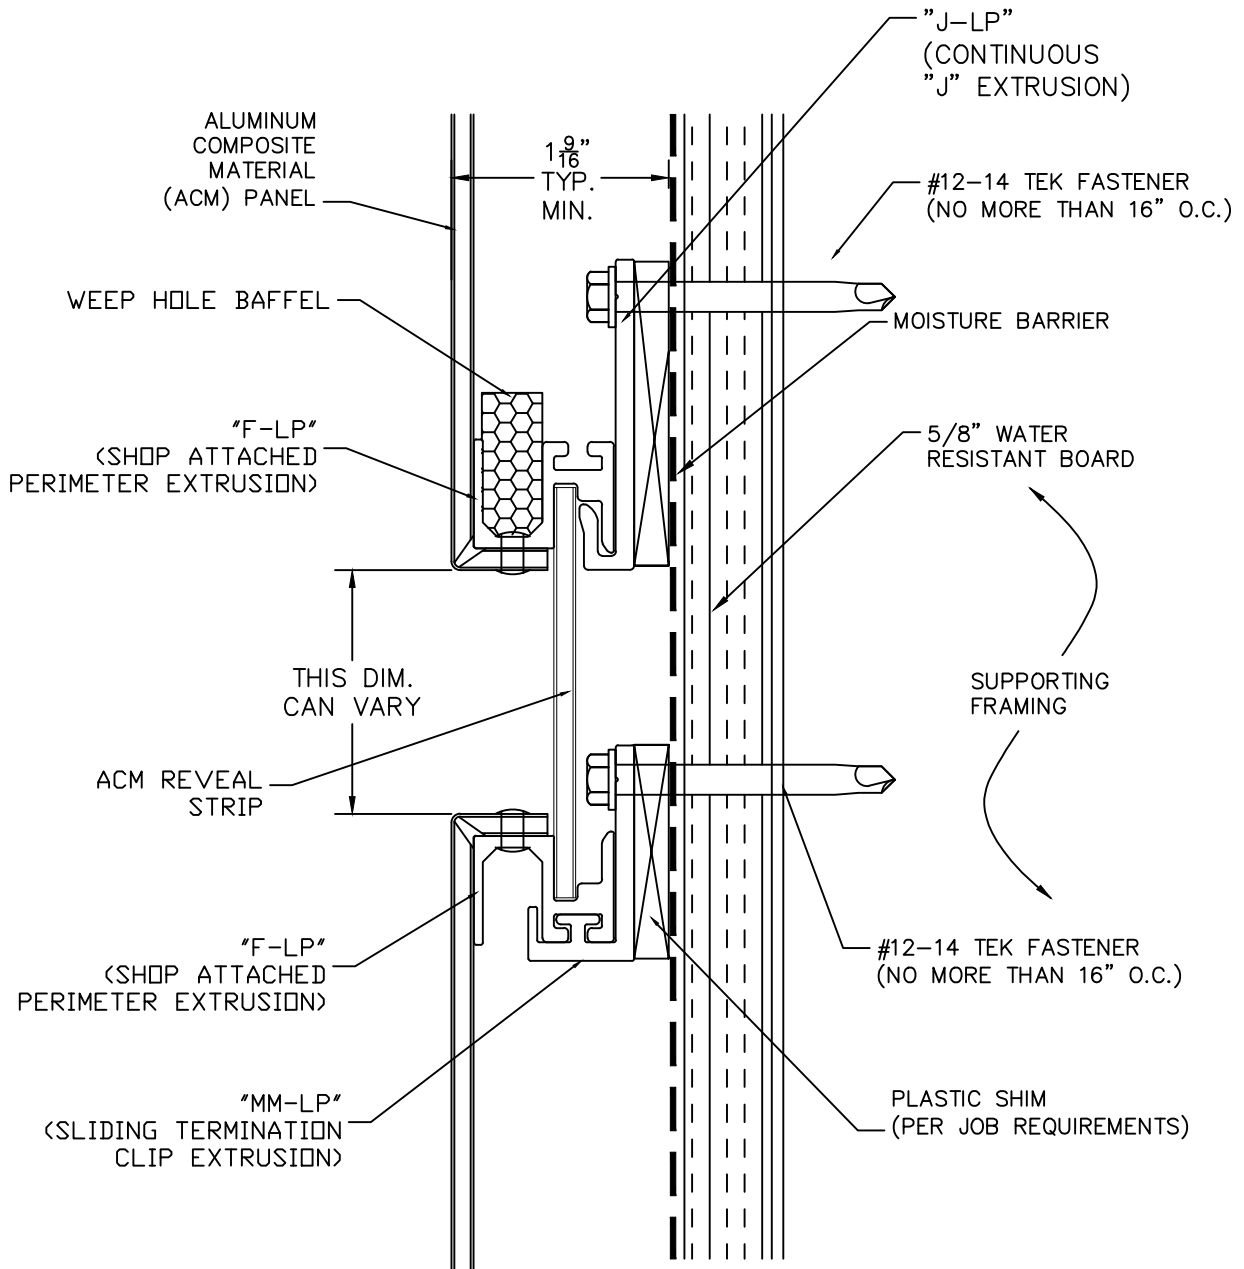
5 TYP. REVEAL JT.

SCALE: NONE

ALUMINUM
COMPOSITE
MATERIAL
(ACM) PANEL

$1\frac{9}{16}$"
TYP.
MIN.

$1\frac{9}{16}$"
TYP.
MIN.

SUPPORTING
FRAMING
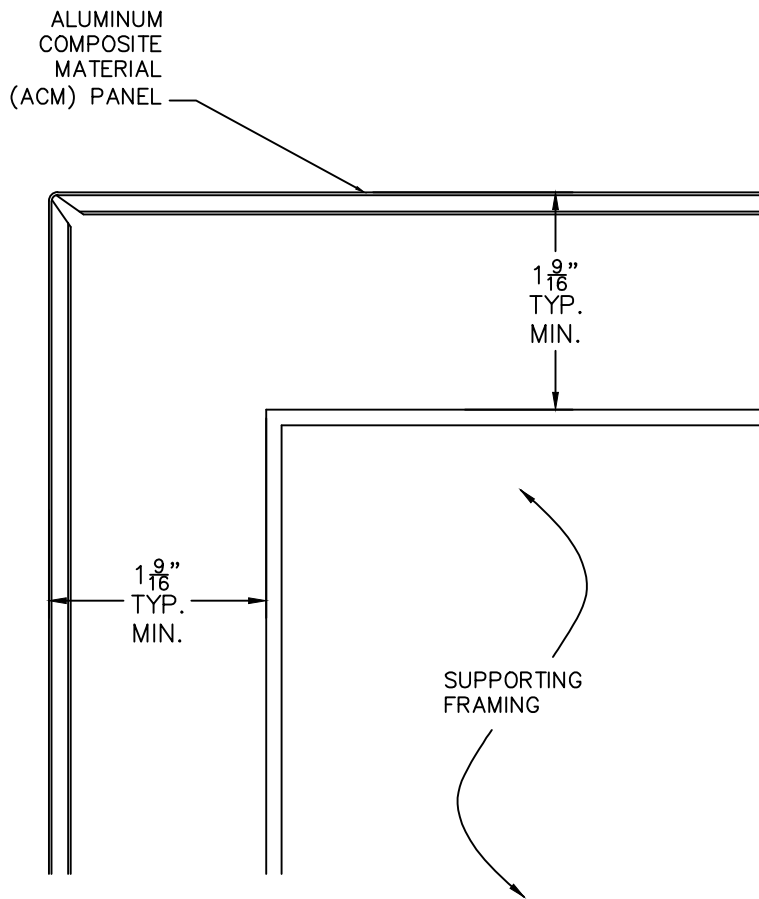
6 OUTSIDE CORNER
SCALE: NONE

#12-14 TEK FASTENER
(NO MORE THAN 16" O.C.)

SUPPORTING
FRAMING

"J-LP"
(CONTINUOUS
"J" EXTRUSION)

"F-LP"
(SHOP ATTACHED
PERIMETER EXTRUSION)

ALUMINUM
COMPOSITE
MATERIAL
(ACM) PANEL

"MM-LP"
(SLIDING TERMINATION
CLIP EXTRUSION)

$1\frac{9}{16}$"
TYP.
MIN.

$\frac{1}{2}$" TYP.

#12-14 TEK FASTENER
(NO MORE THAN 16" O.C.)

SEALANT AND
BACKER-ROD

PLASTIC SHIM
(PER JOB REQUIREMENTS)

"F-LP"
(SHOP ATTACHED
PERIMETER EXTRUSION)

$1\frac{9}{16}$"
TYP.
MIN.

ALUMINUM
COMPOSITE
MATERIAL
(ACM) PANEL
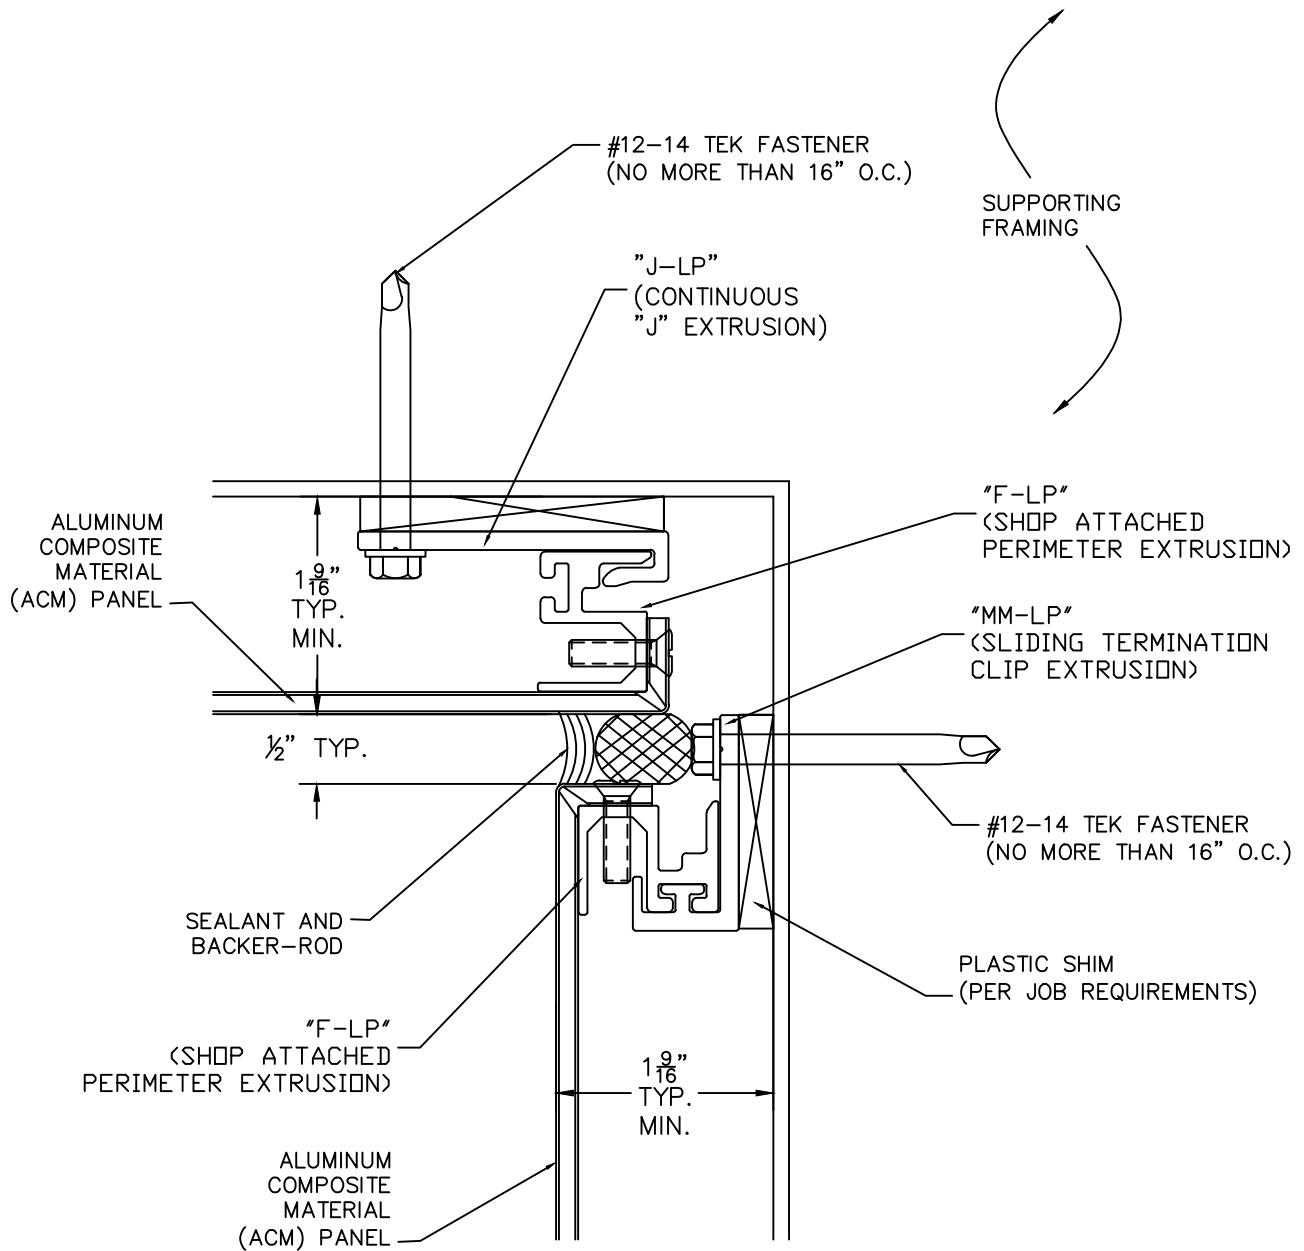
7   SOFFIT CONDITION
SCALE: NONE

PANEL
REF.

½" MIN.

ALUMINUM
COMPOSITE
MATERIAL
(ACM) PANEL

3" MIN.

PANEL
REF.

$1\frac{9}{16}$"
TYP.
MIN.

"MM-LP"
(SLIDING TERMINATION
CLIP EXTRUSION)

SEALANT AND
BACKER-ROD

"F-LP"
(SHOP
ATTACHED
PERIMETER
EXTRUSION)

SUPPORTING
FRAMING

½" TYP.

SEALANT AND
BACKER-ROD

#12-14 TEK FASTENER
(NO MORE THAN 16" O.C.)

PLASTIC SHIM
(PER JOB REQUIREMENTS)

"M-LP"
(SLIDING ATTACHMENT CLIP)
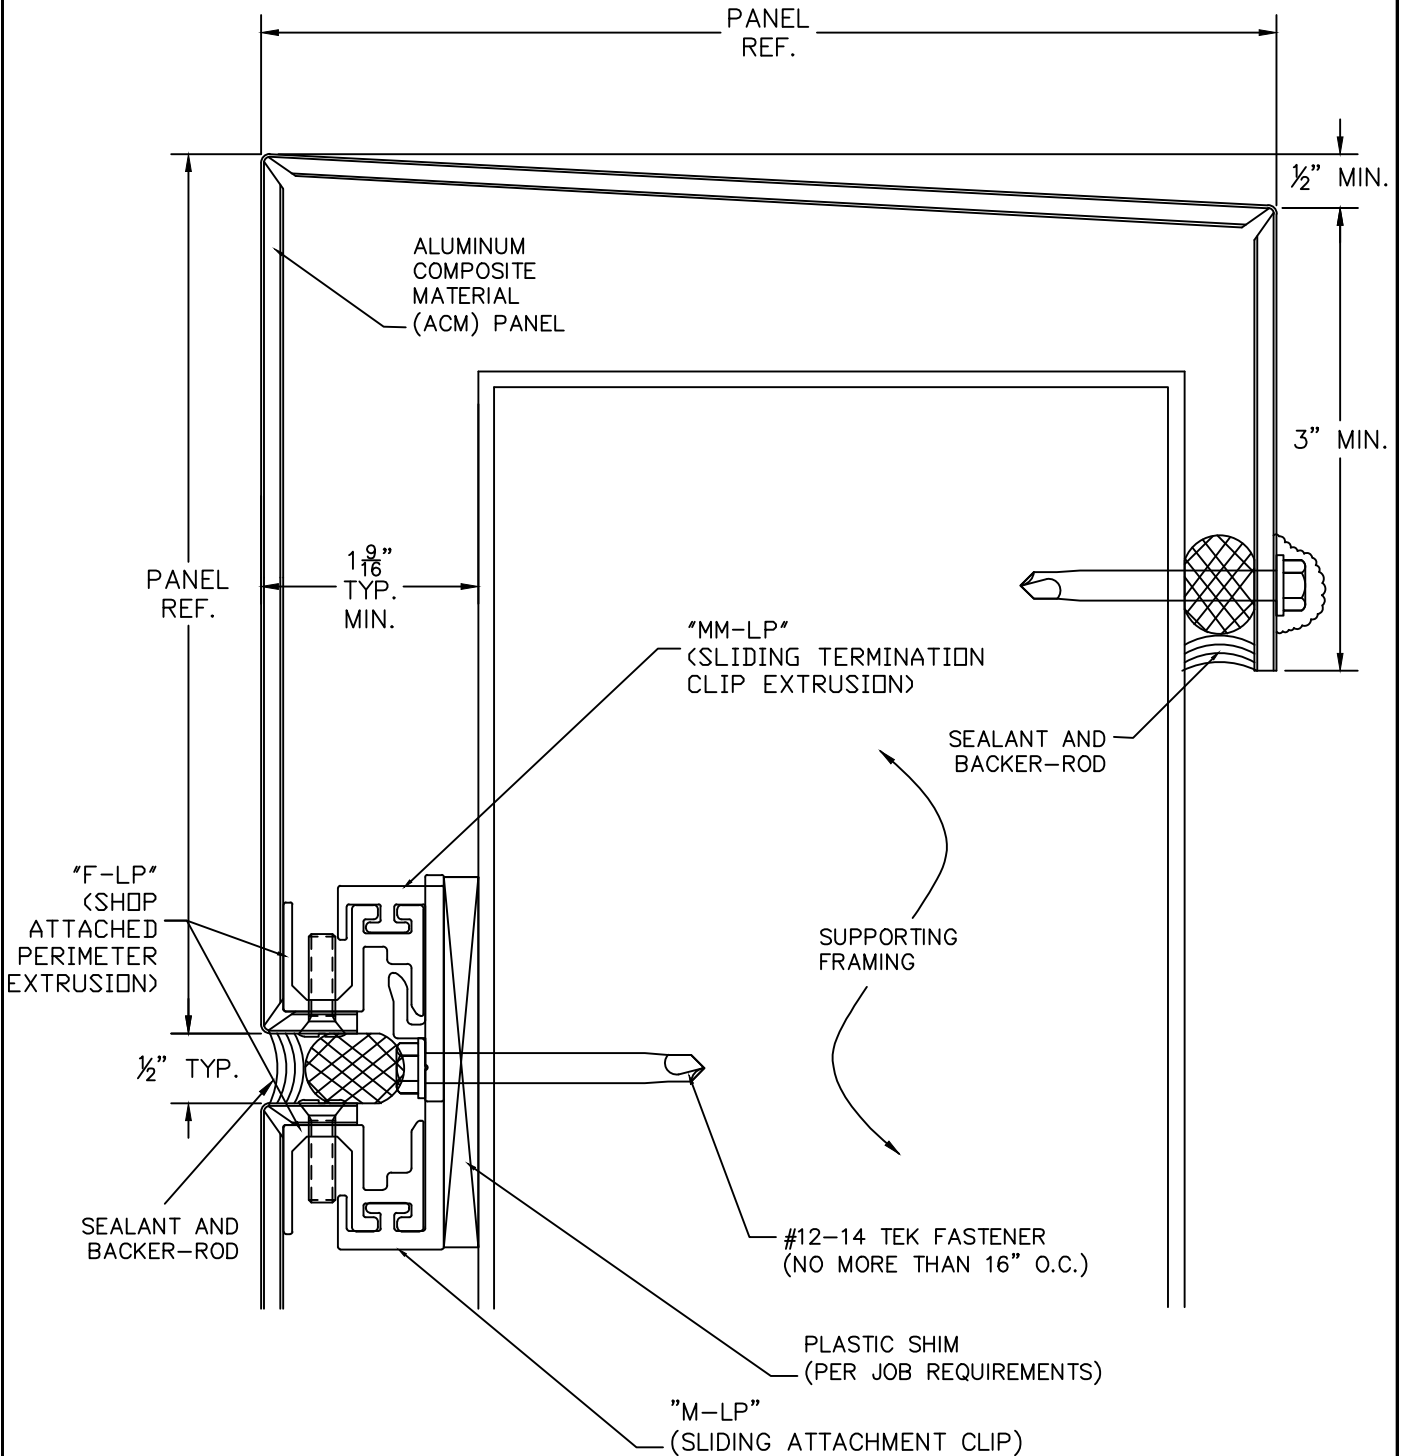
8 PARAPET CONDITION
SCALE: NONE

ALUMINUM
COMPOSITE
MATERIAL
(ACM) PANEL

$1\frac{9}{16}$"
TYP.
MIN.

SUPPORTING
FRAMING

"J-LP"
(CONTINUOUS
"J" EXTRUSION)

"F-LP"
(SHOP ATTACHED
PERIMETER EXTRUSION)

#12-14 TEK FASTENER
(NO MORE THAN 16" O.C.)

PLASTIC SHIM
(PER JOB REQUIREMENTS)

$\frac{1}{2}$" TYP.

SEALANT AND
BACKER-ROD

---
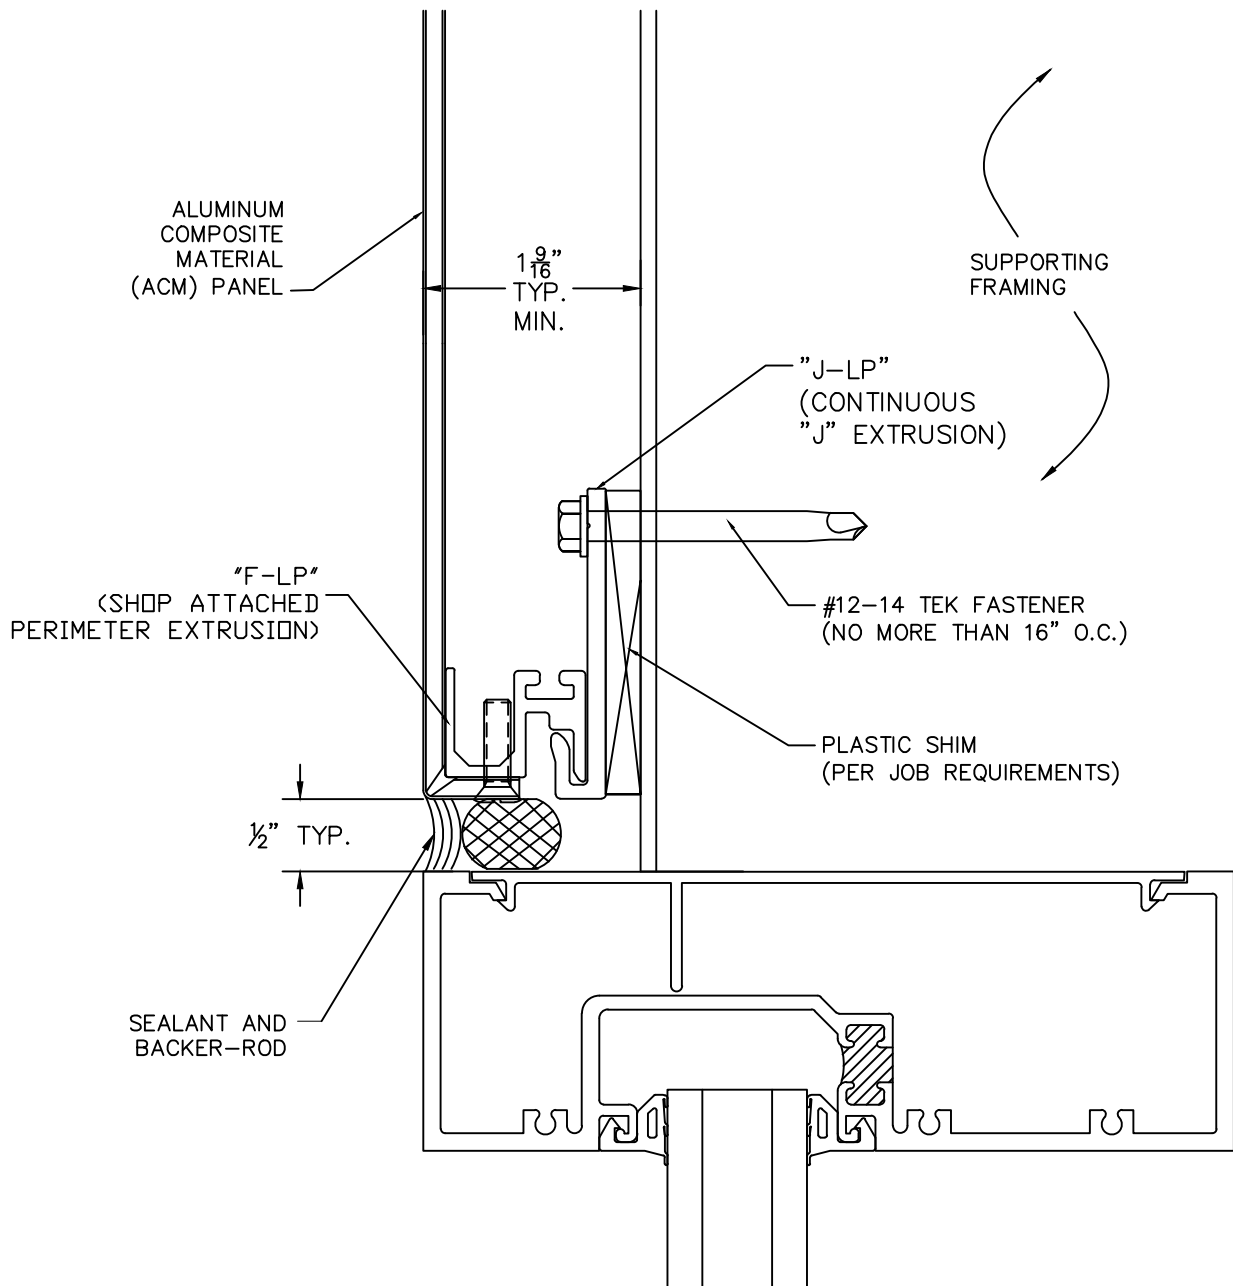
9 WINDOW HEAD CONDITION
SCALE: NONE

#12-14 TEK FASTENER
(NO MORE THAN 16" O.C.)

½" TYP.

PLASTIC SHIM
(PER JOB REQUIREMENTS)

SEALANT AND
BACKER-ROD

"MM-LP"
(SLIDING TERMINATION
CLIP EXTRUSION)

1 $\frac{9}{16}$"
TYP.
MIN.

SUPPORTING
FRAMING

ALUMINUM
COMPOSITE
MATERIAL
(ACM) PANEL
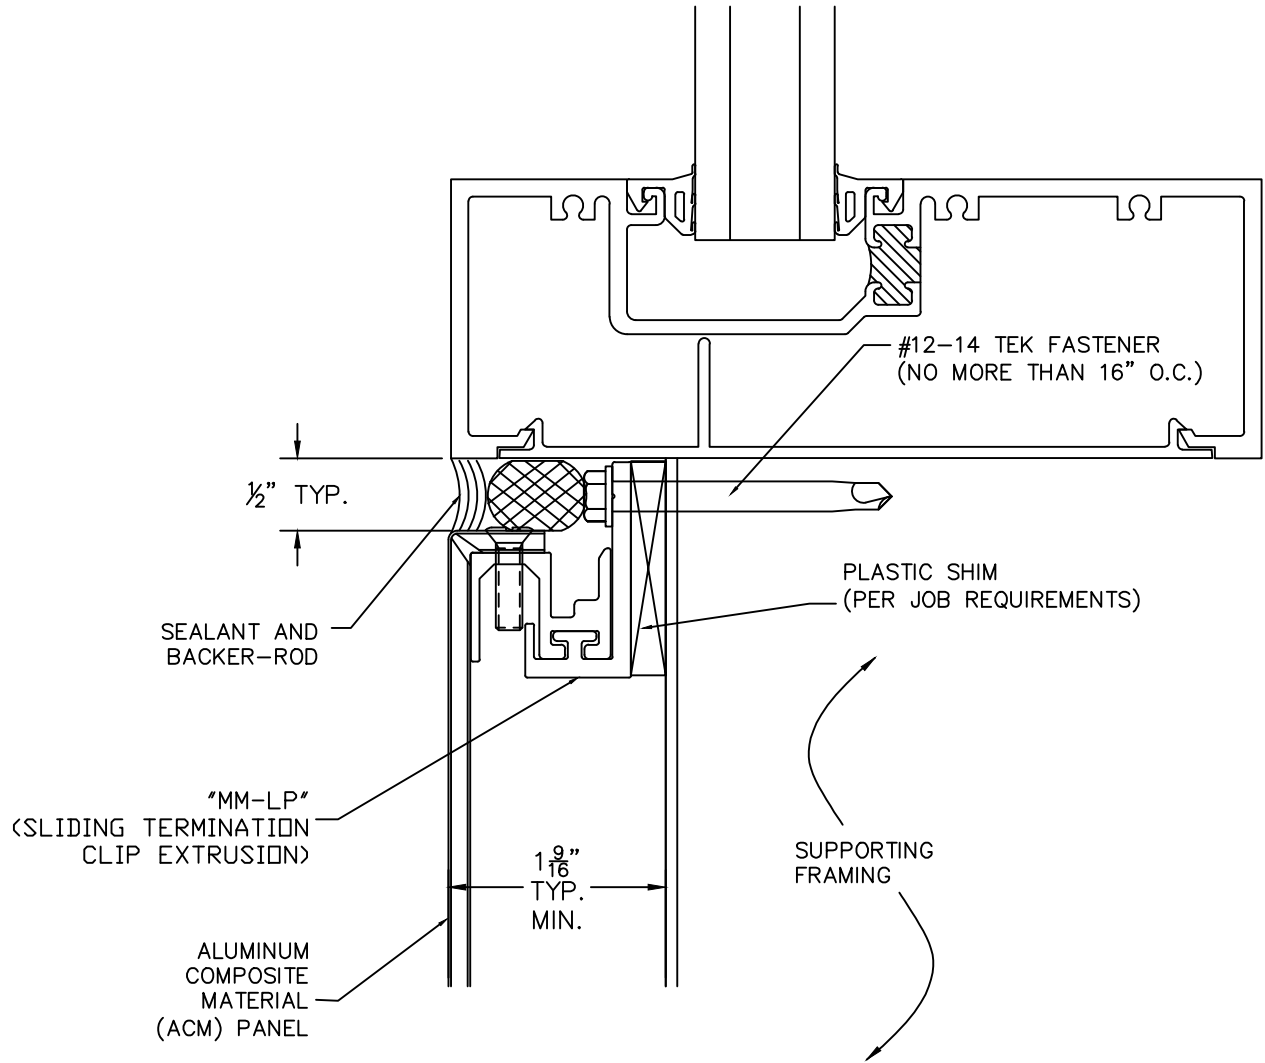
10 WINDOW SILL CONDITION
SCALE: NONE

SUPPORTING
FRAMING

#12-14 TEK FASTENER
(NO MORE THAN 16" O.C.)

PLASTIC SHIM
(PER JOB REQUIREMENTS)

$1\frac{9}{16}$"
TYP.
MIN.

ALUMINUM
COMPOSITE
MATERIAL
(ACM) PANEL

"MM-LP"
(SLIDING TERMINATION
CLIP EXTRUSION)

"F-LP"
(SHOP ATTACHED
PERIMETER EXTRUSION)

SEALANT AND
BACKER-ROD

½" TYP.

11 WINDOW JAMB CONDITION
SCALE: NONE

#12-14 TEK FASTENER
(NO MORE THAN 16" O.C.)

SUPPORTING
FRAMING

PLASTIC SHIM
(PER JOB REQUIREMENTS)

$1\frac{9}{16}$"
TYP.
MIN.

ALUMINUM
COMPOSITE
MATERIAL
(ACM) PANEL

"MM-LP"
(SLIDING TERMINATION
CLIP EXTRUSION)

"F-LP"
(SHOP ATTACHED
PERIMETER EXTRUSION)

SEALANT AND
BACKER-ROD

½" TYP.

MASONRY
OR OTHER
MATERIAL
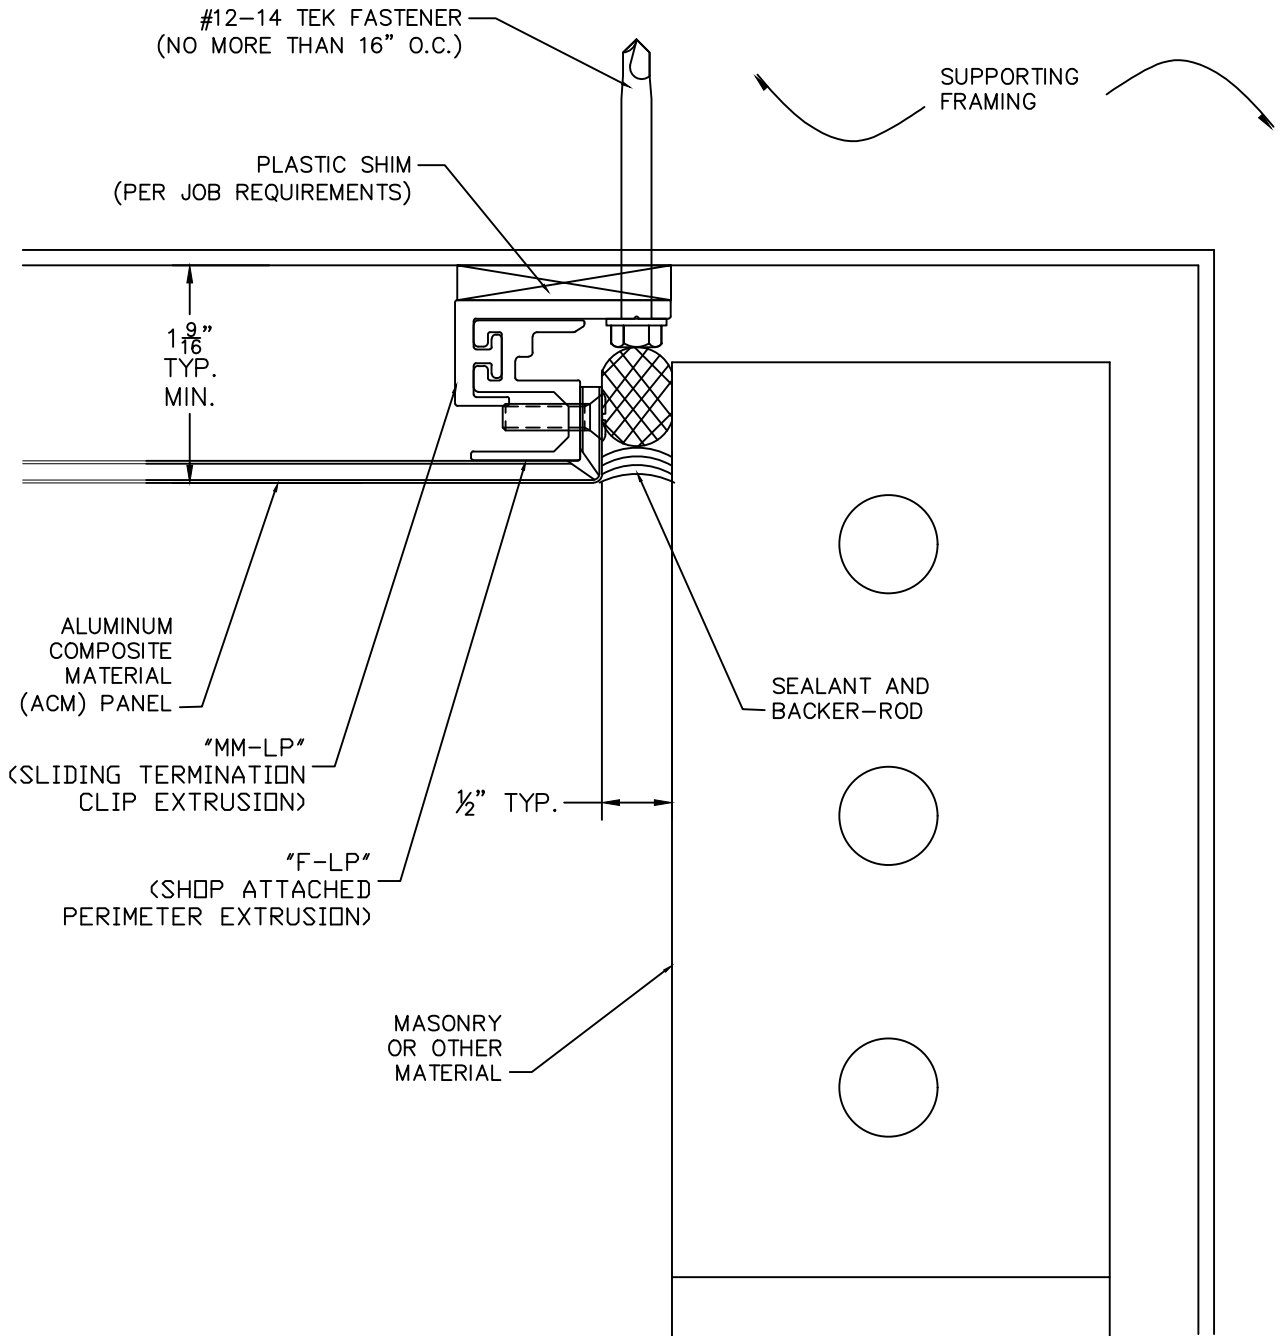
12 JAMB CONDITION @ BRICK
SCALE: NONE

SUPPORTING FRAMING

#12-14 TEK FASTENER
(NO MORE THAN 16" O.C.)

"MM-LP"
(SLIDING TERMINATION
CLIP EXTRUSION)

PLASTIC SHIM
(PER JOB REQUIREMENTS)

"M-LP"
(SLIDING ATTACHMENT CLIP)

ALUMINUM
COMPOSITE
MATERIAL
(ACM) PANEL

"F-LP"
(SHOP ATTACHED
PERIMETER EXTRUSION)

"F-LP"
(SHOP ATTACHED
PERIMETER EXTRUSION)

½" TYP.

SEALANT AND
BACKER-ROD
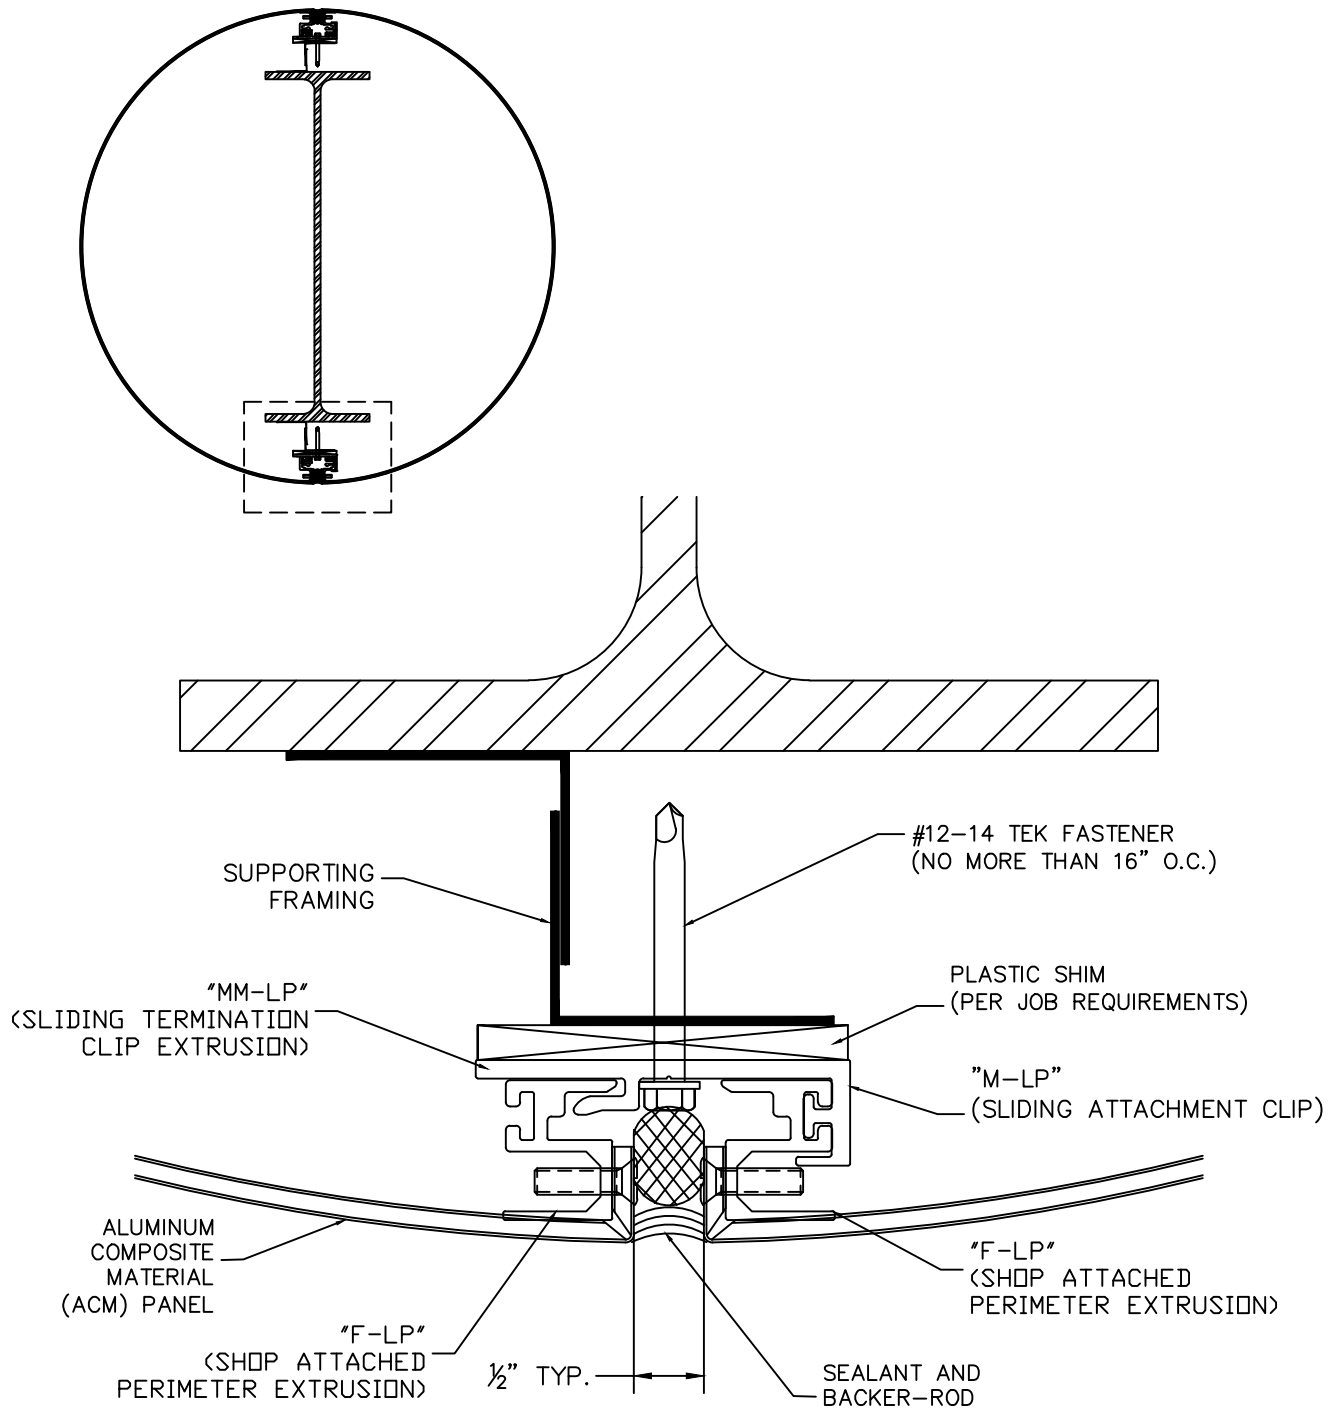
13 COLUMN DETAIL

SCALE: NONE